

Owner's Manual

8" ROOF MOUNT TFTLCD MONITOR



8" ROOF MOUNT TFT LCD MONITOR
YOU'RE NOW READY FOR
MORE FUN ON
THE ROAD THAN EVER BEFORE



PYLE®

PLVWR8000

WWW.PYLEAUDIO.COM

YOU'RE NOW READY FOR MORE FUN ON THE ROAD THAN EVER BEFORE

8" TFT LCD Roof-mount Monitor

OSD ADJUSTMENT

- Press the POWER ON/OFF button on the monitor or remote unit to turn on the power.
 - Touch power switch on the monitor to select video for 2 inputs.
 - Press powerswitch on the monitor 2 second to turn off the monitor
- Press MENU button on the monitor or remote unit to activate the OSD function show on the LCD screen and press again to select the adjustment item as below.
 BRIGHTNESS
 CONTRAST
 COLOR
 U/D NORM/REV (NORMAL/REVERSE)
 R/L NORM/REV (NORM/REVERSE)
 RST RESET
- Press UP/DOWN button on the monitor or remote unit to increase or decrease the value of the adjustment functions for optimum viewing.
 REMOTE CONTROL UNIT
 POWER on/off
 Press this button to change mode of the screen picture.
 - 16 : 9 wide mode
 - 4 : 3 full mode

VIDEO SELECT

MIRROR

Press this button to reverse the picture horizontally. (LEFT TO RIGHT)

MENU

Up/down

FEATURES ON SCREEN DISPLAY CONTROL

ON SCREEN DISPLAY CONTROL

2 VIDEO INPUTS

16: 9 WIDE SCREEN TFT-LCD PANEL

SUPER BRIGHT TFT-LCD PANEL

4. WIRE CONNECTION

Red wire: +ve

Black wire: -ve

Violet wire: none

Yellow RCA Jack: Video 1

White RCA Jack: Video 2


5. ACCESSORIES

EXTENSION MINIDIN CABLE 1PC

REMOTE CONTROL UNIT 1 PC

VIDEO CABLE 1 PC

MOUNTING PLATE 1 PC

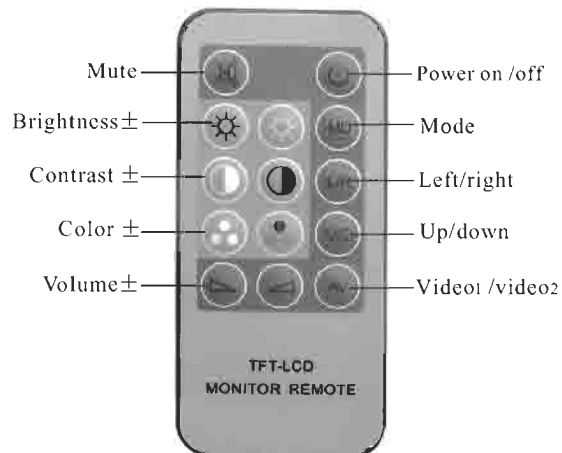

SPECIFICATIONS:

DISPLAY	8" WIDE SCREEN TFT-LCD
BACK LIGHT	BUILT IN CCFT
DOT FORMAT	1440 x 480
DOT PITCH	0.107(H) x 0.732(V)
VIEWING ANGLE	L/R/T/B 55/55/15/35
COLOR FIGURATION	STRIPE
BRIGHTNESS RATING	370 cd/m
CONTRAST RATIO	150
NUMBER OF PIXELS	" 691, 200"
VIDEO INPUT LEVEL	COMPOSITE 1.0V P-P/75 OHMS
VIDEO INPUT SYSTEMS	NTSC/PAL AUTO SWITCHING
POWER SOURCE	DC 12V +/- 15%
POWER CONSUMPTION	700Ma (max) / 10w (max)
OPERATION TEMPERATURE	-20 Celcius to + 75 Celcius
STORAGE TEMPERATURE	-30 Celcius to + 85 Celcius
DIMENSIONS	212 (W) x 183 (H) x 38 (D) mm
NET WEIGHT	0.85 KGS